



# Optimat 3E 6-way face frame hinge

Opening angle: 110°  
 Drilling diameter: 35 mm  
 Cup distance C: 2,5 mm\*)  
 Cup depth: 10,0 mm

Depth adjustment: +2.4 mm/-0.6 mm  
 Side adjustment: +1.5 mm/-1.5 mm  
 Height adjustment: +2.5 mm/-2.5 mm  
 Packing unit: 200 pcs


Screw-on T 42/10

Press-in T 43/10



## Overlay


1/2"  
(12,7 mm)

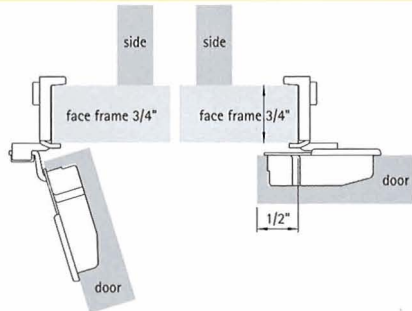

available on request

904 049 9

1 1/4"  
(31,75 mm)




available on request

904 050 0

\*)For back bevelled doors (1/2" overlay by use of 4 mm cup distance)

7/16"  
(11,1 mm)

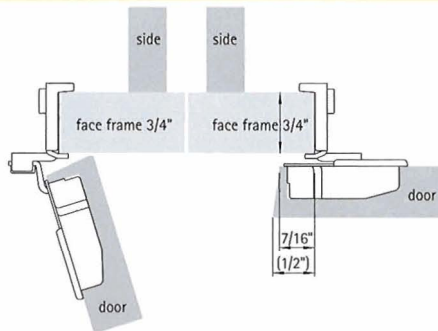

available on request

904 049 8

Cover cap  
for Optimat 3E  
available on request

